

RGH24 encoder system



Renishaw's RGH24 series is a non-contact optical encoder system. The compact readhead features a set-up led indicator, unique filtering optics for excellent dirt immunity, and integral interpolation down to 10 nm. RGH24 offers proven reliable performance and value making it one of the of the most commonly applied encoder systems.

The RGH24 reads the 20 µm pitch RGS20 gold tape-scale and outputs a choice of industry standard 1 Vpp analogue or RS442 digital signals. RGS20 is suitable for mounting to most common engineering materials including metals, granites, ceramics and composites. The scale can be mastered to the axis substrate by means of a specially formulated pre-applied adhesive and epoxy fastened 'end clamps'. This method ensures the differential movement between the scale and the substrate is close to zero, even throughout significant temperature swings.

The RGH24 range has also proven to be resilient to conditions considered challenging for most open optical encoders. They have been installed by many of the world's leading linear motion OEMs in a wide range of applications such as metrology, machine tool, electronics, semiconductor and FPD manufacturing.

RGH24 readhead:


- Compact size and low mass
- Non-contact open optical system
- Integral interpolation
- Industry standard digital and analogue options
- Resolutions from 5 µm to 10 nm
- Integral reference or limit sensor
- Integral set-up LED

RGS20 scale:

- 'Cut-to-length' flexibility
- Lengths from 100 mm to over 50 m
- Protective lacquer or tough polyester coating option for applications using harsh solvents
- Efficient, accurate installation
- Affixes to most common engineering materials
- Self-adhesive backing tape
- Applicator tool allows scale to be installed using the motion of the axis

RGH24 readhead installation drawing

Dimensions and tolerances in mm

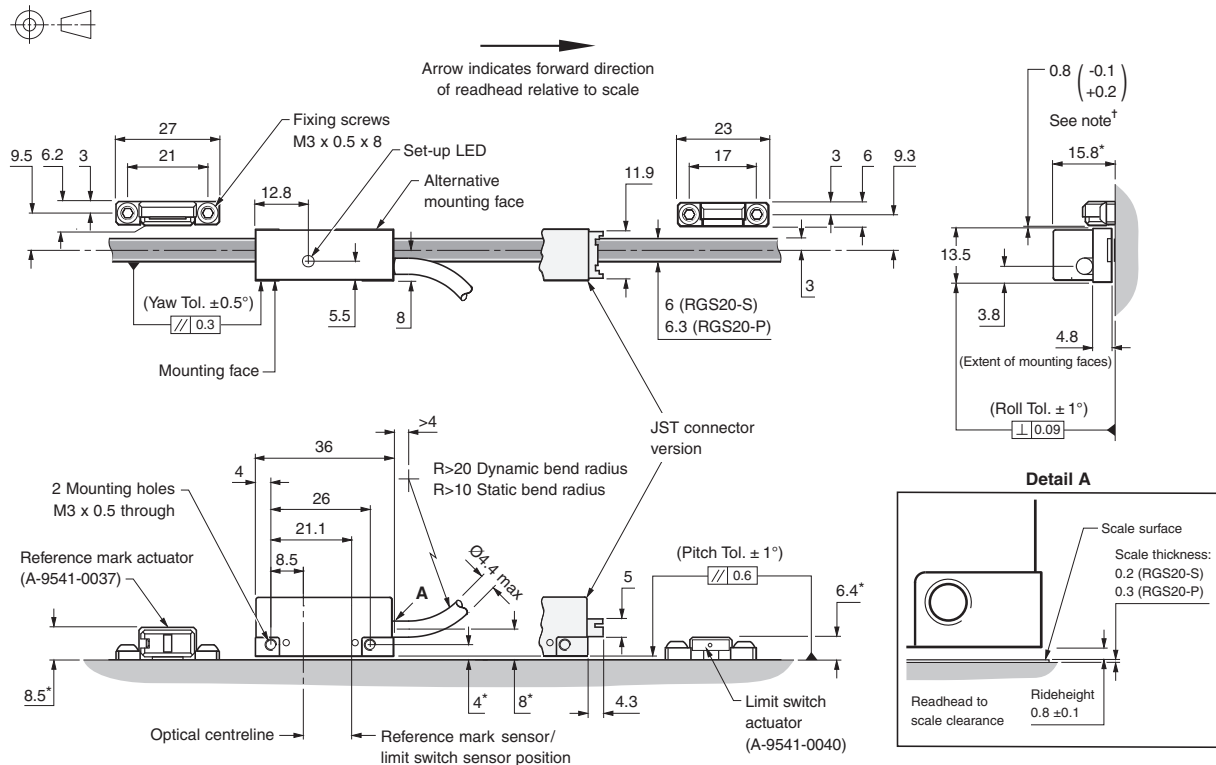

*Dimensions measured from substrate.


†Required nominal 0.8 gap can be set using blue readhead spacer (supplied) positioned between readhead and actuator when positioning/fixing the actuator.

General specifications

Power supply	5 V $\pm 5\%$	120 mA
		NOTE: Current consumption figures refer to unterminated readheads. For digital outputs a further 25 mA per channel pair (e.g. A+, A-) will be drawn when terminated with 120 Ω . For analogue outputs a further 20 mA will be drawn when terminated with 120 Ω . Power from a 5 V dc supply complying with the requirements for SELV of standard IEC BS EN 60950-1. Ripple 200 mVpp@frequency up to 500 kHz maximum.
Temperature	Storage	-20 $^\circ\text{C}$ to +70 $^\circ\text{C}$
	Operating	0 $^\circ\text{C}$ to +55 $^\circ\text{C}$
Humidity		95% relative humidity (non condensing) to EN 60068-2-78
Sealing		IP40
Acceleration	Operating	500 m/s ² , 3 axes
Shock	Non-operating	1000 m/s ² , 6 ms, ½ sine, 3 axes
Vibration	Operating	100 m/s ² max @ 55 Hz to 2000 Hz, 3 axes
Mass	Read head	11 g
	Cable	34 g/m
Cable		8 core, double shield, maximum diameter 4.4 mm. Flex life >20 x 10 ⁶ cycles at 20 mm bend radius.
Connector options	Code - connector type	Application
	A - 9 way D type plug D - 15 way D type plug L - 15 way D type plug F - unterminated cable Z - JST connector	all readheads RGH24D X, Z, W, Y, H, I and O RGH24B all readheads all readheads

RGS20 scale installation drawing

Dimensions and tolerances in mm

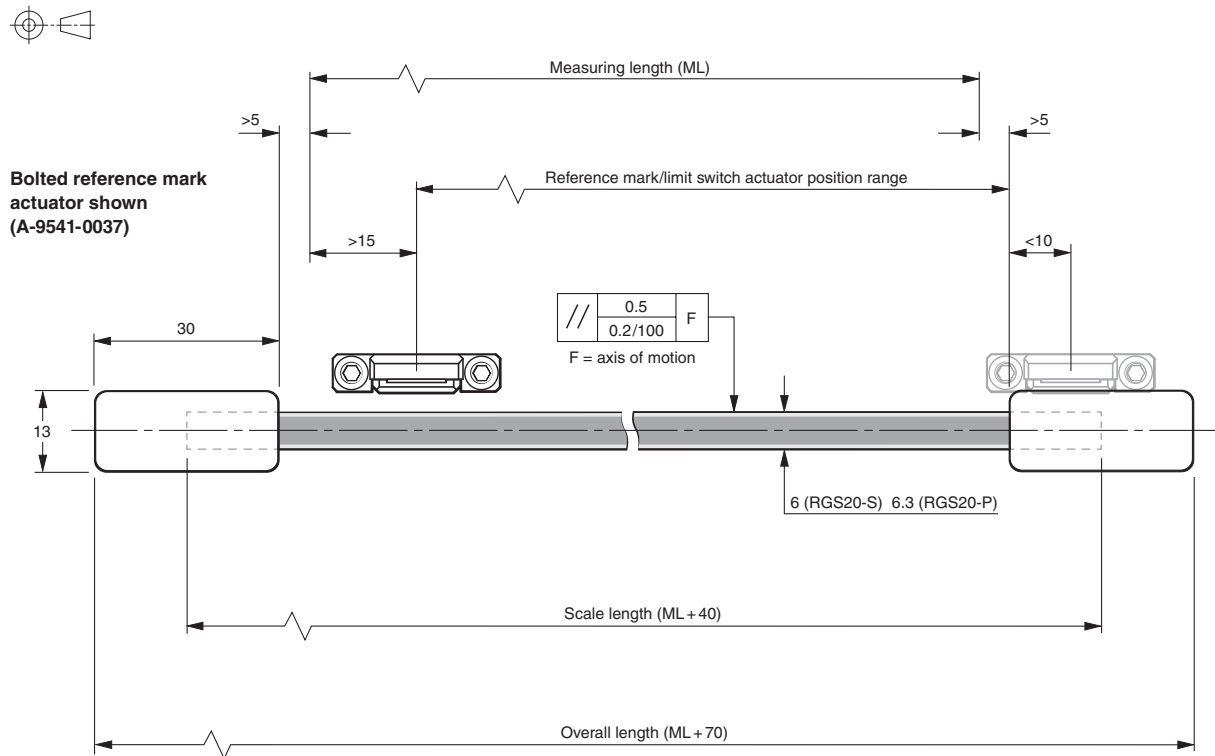

NOTE: The surface roughness of the scale mounting surface must be ≤ 3.2 Ra.

The parallelism of the scale surface to the axis of motion (readhead rideheight variation) must be within 0.05 mm.

Scale specifications

Scale type	RGS20-S - reflective gold plated steel tape with protective lacquer coating. Adhesive backing tape allows direct mounting to the machine substrate. RGS20-P - reflective gold plated steel tape with tough polyester coating for applications using harsh solvents. Adhesive backing tape allows direct mounting to the machine substrate.
Scale period	RGS20-S, RGS20-P = 20 μm
Linearity	RGS20-S = ± 3 $\mu\text{m}/\text{m}$ RGS20-P = ± 5 $\mu\text{m}/\text{m}$
Scale length	Up to 100 mm – 50 m (>50 m by special order)
Form	RGS20-S = 0.2 mm x 6 mm (H x W) includes adhesive RGS20-P = 0.3 mm x 6.3 mm (H x W) includes adhesive
Substrate materials	Metals, ceramics and composites with expansion coefficients between 0 and 22 $\mu\text{m}/\text{m}/^\circ\text{C}$ (steel, aluminium, invar, granite, ceramic etc.)
Expansion coefficient	Matches that of substrate material with scale ends fixed by epoxy mounted end clamps
End fixing	Epoxy mounted end clamps (A-9523-4015) using 2 part epoxy adhesive (A-9531-0342) Scale end movement <1 μm over temperature range -20 $^\circ\text{C}$ to +50 $^\circ\text{C}$
Operating specification	Temperature: -10 $^\circ\text{C}$ to +120 $^\circ\text{C}$ (Scale only) Minimum installation temperature: 10 $^\circ\text{C}$ Humidity: 95% relative humidity (non condensing) to EN 60068-2-78
Storage	Temperature: -20 $^\circ\text{C}$ to +70 $^\circ\text{C}$.

Speed performance

Digital readheads

Non-clocked output readheads

Head type	Maximum speed (m/s)	Lowest recommended counter input frequency (MHz)
D (5 µm)	8.0	$\left(\frac{\text{Encoder velocity (m/s)}}{\text{Resolution (µm)}} \right) \times 4 \text{ safety factor}$
X (1 µm)	5.0	
Z (0.5 µm)	3.0	

Clocked output readheads

The RGH24W, Y, H, I and O readheads are available with a variety of different clocked outputs. Customers must ensure they comply with the lowest recommended counter input frequency.

Standard connector options (A, D and F)	JST connector options (Z)	Maximum speed (m/s)					Lowest recommended counter input frequency (MHz)
		Head type					
		W (0.2 μm)	Y (0.1 μm)	H (50 nm)	I (20 nm)	O (10 nm)	
60	—	—	3.0	—	—	—	50
61	—	3.0	1.6	—	—	—	20
62	—	1.6	0.8	—	—	—	10
30	35	—	0.7	0.35	0.13	0.65	12
31	36	—	0.5	0.25	0.09	0.045	8
32	37	0.7	—	—	—	—	6
33	38	0.5	0.25	0.12	0.04	0.02	4

NOTE: Maximum speeds of clocked output variants assume 3 m maximum cable length and minimum 5 V supply at readhead connector.

Analogue readheads

RGH24B – 4 m/s (-3dB)


Output signals

Connections


RGH24D, X, Z, W, Y, H, I and O RS422A digital

Function	Signal		Colour	9 way D type (A)	JST (Z)	15 way D type (D)
Power	5 V		Brown	5	9	7,8
	0 V		White	1	10	2,9
Incremental signals	A	+	Green	2	8	14
		-	Yellow	6	7	6
	B	+	Blue	4	2	13
		-	Red	8	1	5
Reference mark/limit switch	Z+/Q-		Pink	3	5	12
	Z-/Q+		Grey	7	6	4
Shield	Inner		—	9	N/A	15
	Outer		—	Case	N/A	Case
Remote LED driver	Green		—	N/A	4	N/A
	Red		—	N/A	3	N/A


9 way D type plug (termination code A)

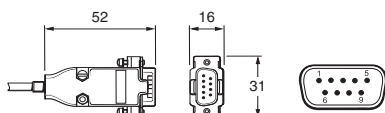

10 way JST plug (termination code Z)



15 way D type plug (termination code D)

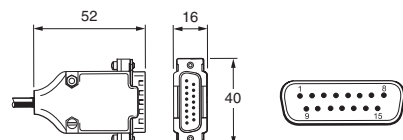


Connections


RGH24B 1 Vpp analogue

Function	Signal	Colour	9 way D type (A)	JST (Z)	15 way D type (L)
Power	5 V	Brown	5	9	4,5
	0 V	White	1	10	12,13
Incremental signals	V ₁ +	Green	2	8	9
	V ₁ -	Yellow	6	7	1
	V ₂ +	Blue	4	6	10
	V ₂ -	Red	8	5	2
Reference mark	V ₀ +	Pink	3	2	3
	V ₀ -	Grey	7	1	11
Shield	Inner	—	9	N/A	15
	Outer	—	Case	N/A	Case


9 way D type plug (termination code A)

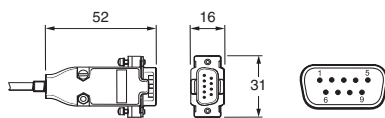

10 way JST plug (termination code Z)




15 way D type plug (termination code L)

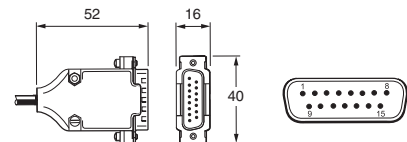

Electrical connections

Grounding and shielding

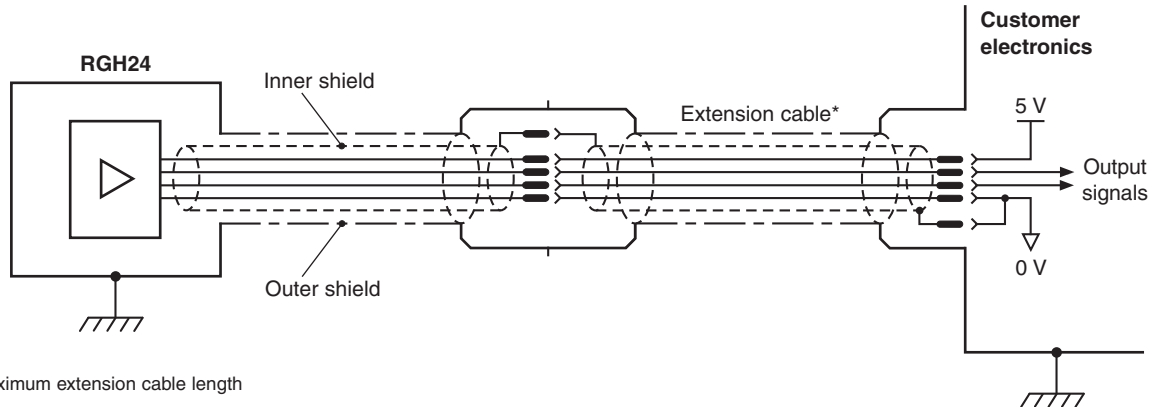


*Maximum extension cable length

RGH24B-100 m, RGH24D, X and Z- 50 m, RGH24W, Y, H, I and O-20 m

IMPORTANT: The outer shield should be connected to the machine earth (Field Ground). The inner shield should be connected to 0 V. Care should be taken to ensure that the inner and outer shields are insulated from each other. If the inner and outer shields are connected together, this will cause a short between 0 V and earth, which could cause electrical noise issues.


Recommended signal termination

Digital outputs - RGH24D, X, Z, W, Y, H, I and O

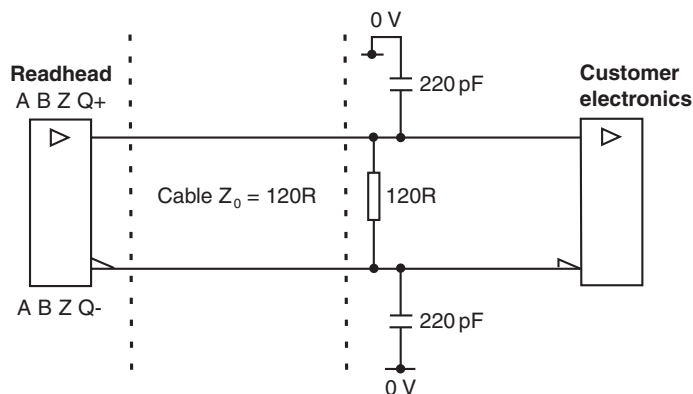


Standard RS422A line receiver circuitry
Capacitors recommended for improved noise immunity.

Analogue output - RGH24B



Remote LED driver outputs


JST connector version allows for remote monitoring of readhead status.

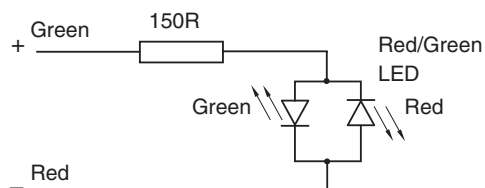


Output specifications

Digital output signals - type RGH24D, X, Z, W, Y, H, I and O
Form - Square wave differential line driver to EIA RS422A

Incremental† 2 channels A and B in quadrature
(90° phase shifted)

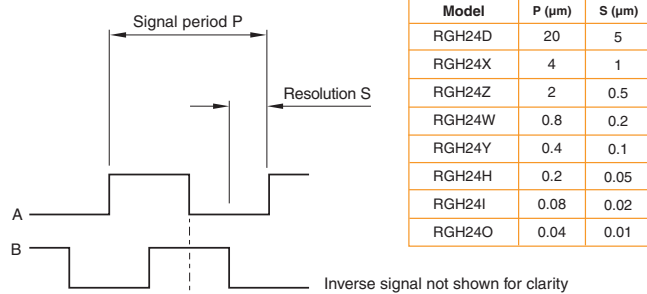

Limit Asynchronous pulse

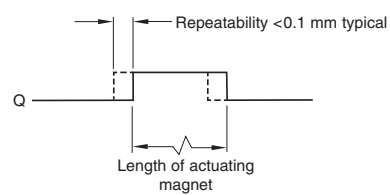


NOTE: RGH24 readheads are available with reference mark or limit switch detection. Select output at order

Inverse signal not shown for clarity. Actuation device A-9541-0040

NOTE: Limit output not available for readheads with option 60, 61 and 62.

Reference†

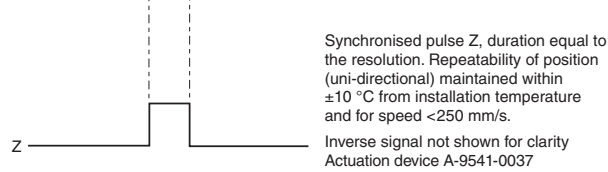

Alarm


3-state alarm

Incremental channels forced open circuit for >20 ms when signal too low for reliable operation.


For RGH24W, Y, H, I and O only, incremental channels forced open circuit for >10 ms when signal too low or speed too high for reliable operation.

Analogue output signals type RGH24B (1Vpp)

Incremental 2 channels V_1 and V_2 differential sinusoids in quadrature
(90° phase shifted)

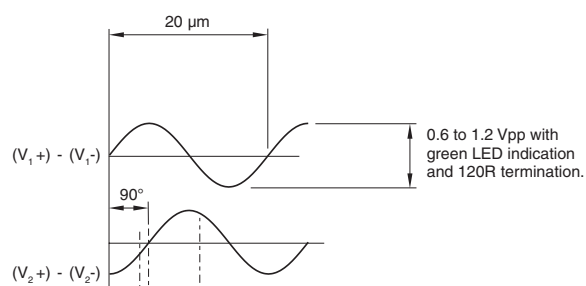


Reference

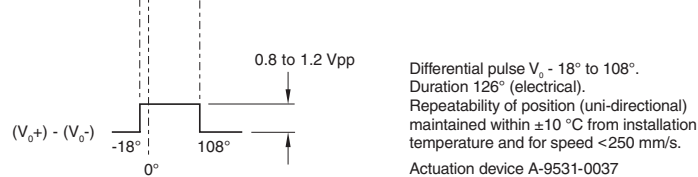



RGH24 system = readhead

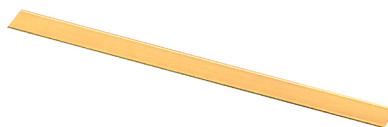

+ scale



+ accessories

Readhead part numbers

RGH24 X 30 D 00 A

Readhead series

Output

- B - analogue 1 Vpp
- D - 5 µm digital
- X - 1 µm digital
- Z - 0.5 µm digital
- W - 0.2 µm digital
- Y - 0.1 µm digital
- H - 50 nm digital
- I - 20 nm digital
- O - 10 nm digital

Cable length

- 00 - no cable
- 10 - 1.0 metres
- 15 - 1.5 metres
- 30 - 3.0 metres
- 50 - 5.0 metres

Connector types

- A - 9 way D type plug
- D - 15 way D type plug
- F - flying lead (unterminated cable)
- L - 15 way analogue D type plug
- Z - JST connector (direct output - no cable)

Options

- | | |
|--|---------------------------------------|
| 00 - standard head (no clocked output) | 01 - JST (no clocked output) |
| 60 - 50 MHz clocked output (reference mark only) | 35 - 12 MHz clocked output (JST head) |
| 61 - 20 MHz clocked output (reference mark only) | 36 - 8 MHz clocked output (JST head) |
| 62 - 10 MHz clocked output (reference mark only) | 37 - 6 MHz clocked output (JST head) |
| 30 - 12 MHz clocked output | 38 - 4 MHz clocked output (JST head) |
| 31 - 8 MHz clocked output | |
| 32 - 6 MHz clocked output | |
| 33 - 4 MHz clocked output | |

Reference mark/limit switch

- A - reference mark
- B - limit switch (digital output heads only)

NOTE: Not all combinations are valid. Check valid options online at www.renishaw.com/epc

Scale part numbers

RGS20-S

20 µm pitch lacquered tape scale with self-adhesive backing tape.

Part number	Available lengths	Available in increments of	Ordering instructions
A-9517-0043	100 mm to 50,000 mm*	1 mm	Ordering a quantity of 2455 will result in a length of 2455 mm (multiple orders are required for multiple lengths)
A-9517-0004	1 m to 50 m*	1 m	Ordering a quantity of 15 will result in a length of 15 metres (multiple orders are required for multiple lengths).
A-9523-6xxx	10 cm to 999 cm	1 cm	xxx is the length in cm (ordering A-9523-6450 for example will result in a length of 450 cm)
A-9523-80xx	10 m to 50 m*	1 m	xx is the length in metres (ordering A-9523-8033 for example will result in a length of 33 metres)









RGS20-P

20 µm pitch polyester coated tape scale with self-adhesive backing tape.

Part number	Available lengths	Available in increments of	Ordering instructions
A-9517-0046	100 mm to 50,000 mm*	1 mm	Ordering a quantity of 2455 will result in a length of 2455 mm (multiple orders are required for multiple lengths)
A-9517-0045	1 m to 50 m*	1 m	Ordering a quantity of 15 will result in a length of 15 metres (multiple orders are required for multiple lengths).

*Lengths above 50 m are special order only. Please contact your local Renishaw representative.

Accessory part numbers

Part number	Description	Image
A-9541-0037	RGM245S reference mark actuator magnet – screw mounted. A reference sensor within the readhead is used to determine an absolute datum within an incremental measuring system. The sensor does this by detecting the external RGM245S reference mark actuator magnet as the readhead passes it.	
A-9531-0250	RGM22S reference mark actuator magnet – epoxy mounted. A reference sensor within the readhead is used to determine an absolute datum within an incremental measuring system. The sensor does this by detecting the external RGM22S reference mark actuator magnet as the readhead passes it.	
A-9541-0040	RGP245S 90° limit switch actuator magnet – screw mounted. A limit sensor within the readhead detects end of travel by sensing the RGP245S limit switch actuator magnet.	
A-9531-0251	RGP22S limit switch actuator magnet 10 mm long – epoxy mounted. A limit sensor within the readhead detects end of travel by sensing the RGP22S limit switch actuator magnet.	
A-9523-4015	RGC-F end clamp kit – epoxy mounted. The RGC-F end clamps master the RGS scale to the substrate material to match its thermal expansion.	
A-9531-0342	RGG-2 2 part epoxy adhesive. The RGG-2 epoxy is recommended for the mounting of reference marks, limit switches and end clamps.	
A-9541-0124	RGA245 scale applicator guide block kit (for RGS20-S lacquered scale). The RGA245 enables efficient and accurate scale application. Fixed to the customers readhead bracket it allows the correct placement of scale relative to where the readhead will be set, and automatically removes the scale backing tape during application.	
A-9541-0305	Scale applicator guide block kit (for RGS20-P polyester coated scale). The scale guide block enables efficient and accurate scale application. Fixed to the customers readhead bracket it allows the correct placement of scale relative to where the readhead will be set, and automatically removes the scale backing tape during application.	

For worldwide contact details, please visit our main website at www.renishaw.com/contact

RENISHAW HAS MADE CONSIDERABLE EFFORTS TO ENSURE THE CONTENT OF THIS DOCUMENT IS CORRECT AT THE DATE OF PUBLICATION BUT MAKES NO WARRANTIES OR REPRESENTATIONS REGARDING THE CONTENT. RENISHAW EXCLUDES LIABILITY, HOWSOEVER ARISING, FOR ANY INACCURACIES IN THIS DOCUMENT.

RENISHAW® and the probe symbol used in the RENISHAW logo are registered trade marks of Renishaw plc in the United Kingdom and other countries.
apply innovation and names and designations of other Renishaw products and technologies are trade marks of Renishaw plc or its subsidiaries.

© 2001-2017 Renishaw plc All rights reserved Issued 0617



L - 9517 - 9677 - 01